
MAX-SUPPRESSTM 60-GAL (227-L)

FAST RESPONSE CAC • MODEL: FMS-60-S



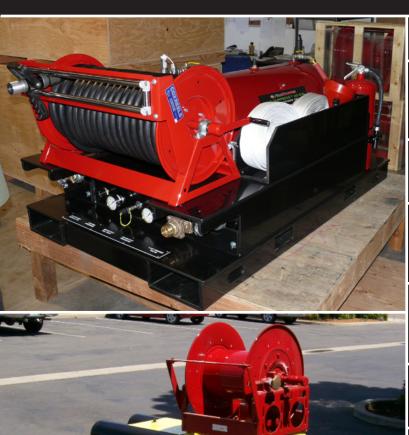

	FEATURES:	SPECIFICATIONS:
	Stainless Steel Tank Micro Polished for Greater Corrosion Resistance Stainless Plumbing	Capacity: 60-gal (227-L) Max OP: >350-psi (24-Bar) Test Pressure: 600-psi (41.4-Bars) Burst Pressure: 1200-psi (82.7-Bars)
	FireStopper® PFE-FR FFC Extinguishing Agent All Fire Class Effective: ABCDK (ABCDF)	Eco-SafeNon-IrritantNon-Aggressive
	Subclass Effective Agent: • Alcohols • Esters • Ethers • Carbon Composites • Rubber • Plastics • Lithium & Sodium Metals, etc.	Cold Environment Resistant: -100° F (-73.3°C) Operating Temp: -40°F (-40°C) Operating Press: >160-psi (11-Bar)
	Air Cylinder (Industrial) Regulator Adjustable Pressure: 0-400-psi (0-27-Bars) Stainless Steel Pressure Gauge	2X 150-ft³ (4.25-m³) @ 2250psi (approx. 155-Bars) Discharge Rate: 300-gal/min (1136-L/m)
	Multiple Foam Expansion Capability: Low Med + Variable Operating Pressure Capability	Foam Expansion Vol.: Low: 10X 600-gal (2271-L) Med: 20X 1200-gal (4542-L)
	Discharge Nozzle: 1" (25.4mm) & 1.5" (38.1mm) FireStopper®/ Akron SaberJet Tri Spay Pistol Grip	Foam Discharge Distance: 1" (25.4mm): 250-300 gpm (496-L/m) /1.5" hose approx.: 450 gpm (1703-L/m) S
	Dispensing Hoses: 100-ft Hard Rubber Booster & Collapsible UL Listed • Usable Hose Length: 500-ft (152-m) per Discharge Line	Approx. Discharge Distance: 1": 65-75-ft (approx. 20-23-m) 2": 85-95-ft (approx. 26-29-m) Subject to Wind Conditions
- Co. Co.	Durable Welded Copolymer Frame	Approx. Height: 33" (838-mm) Approx. Width: 31" (1219-mm) Approx. Length: 55.5" (1829-mm)
	Limited Warranty: 20-year Onshore & 10-Year for Offshore Use (applies to non-wearable parts only)	Approx. Empty Weight: 630 lbs.(286-kg) Charged: 1130 lbs. (603-kg)
	OPTIONS & ACCESSORIES	ADDITIONAL FEATURES
	Hose with Real 500-ft (152.4-m)	Pressure Charged Design for 2-Shots
	Additional 150 ft3 Air Cylinder	Dual Discharge Capability
	Single Discharge Configuration	Skid Mounted for Ultimate Versatility
	Trailer Mount Option	Fitted Durable Canvas Protective Cover